



V. Guldmann A/S
Graham Bells Vej 21-23A
DK-8200 Aarhus N
Tel. +45 8741 3100
Fax +45 8741 3131
info@guldmann.com
www.guldmann.com

GH1 Lifting module **Technical specifications**

Weight and materials

SWL	: 175 kg, 205 kg
Own weight	: 8.0 kg

Covers : Impact-resistant UL 94 V-0 flame retardant recyclable plastic

Dimensions

A	: 580 mm
B	: 350 mm
C	: 156 mm
D	: 184 mm
E, min	: 82 mm
F, min	: 415 mm
G	: 2500 mm
Depth of hoist	: 194 mm

Functions

Operation	: Hand control
Sound level	: 52 dB (A)

Safety

Emergency stop	: Yes
Emergency lowering device	: Yes, electrical
Control of lifting strap	: Yes
Cut-off angle	: 45° along the rail 10° across the rail

Electronics

On/off	: Automatic when used. Soft start/stop. Overload protection.
--------	--

SWL	: 175 kg, 205 kg
Battery	: 1 x 24 V NiMH, 2.8 Ah
Max charging time	: 3 hours

Battery protection : At battery voltage below 22 V the indicator light turns yellow. The hoist stops if the voltage falls below 20 V

Power supply	: 33 V AC, 2.5 A
Supply voltage, transformer	: 100-115/230V AC, 50-60 Hz

Protection classification (IP) according to IEC 60529

Lifting module	: IP 44
Hand control	: IP 44
Charging station	: IP 20
Transformer	: IP 20


Labelling

The product is manufactured in compliance with the Council Directive 93/42/EEC of June 14th 1993, including amendments, as medical device class 1.

Classification

Pursuant to ISO 9999

Patents	: PA 2008 00888 PA 2008 00894 PA 2008 00895
----------------	---

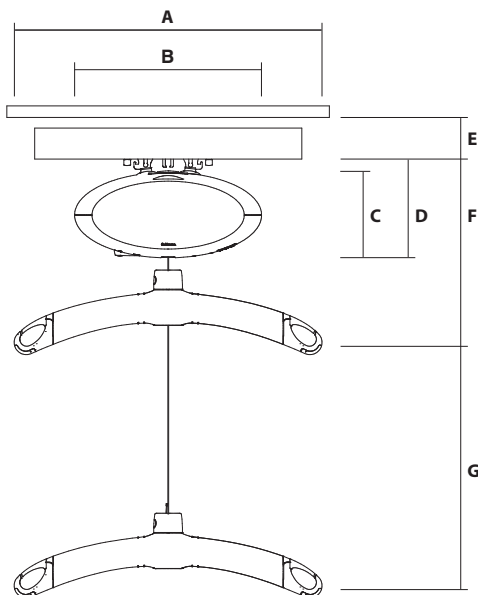

| Time to care |




GH1 Lifting module Technical specifications

GH1 Lifting modules, configurations									
Guldmann hoist type	Product line	Load in kg	Number of lifting straps	Number of lifting motors	Number of horizontal drive motors	Scale module	CLM module	Service module	User interface
GH1	(x)	xxx	x	x	x	x	x	x	x
GH1		175	1	1					Hand control : 0
		205	1	1					

Example: GH1 200 110 0000

GH1		200	1	1	0	0	0	0	0
-----	--	-----	---	---	---	---	---	---	---

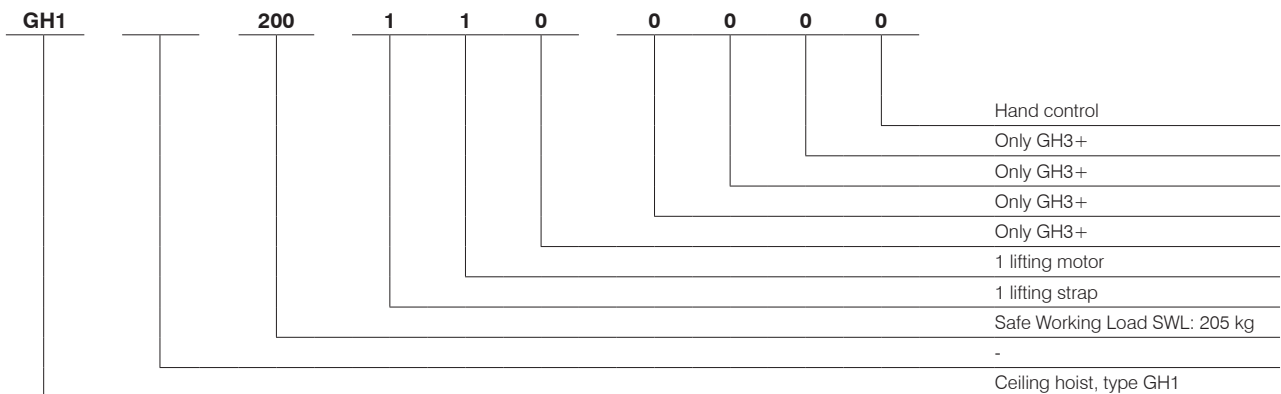

Lifting speed

85 kg load : 30 mm/sec.
 150 kg load : 30 mm/sec.
 Max capacity load, SWL : 30 mm/sec.
 Max. 5 kg load : 60 mm/sec.

Number of lift and Intermittent

Max. number of lifts
 in series : 55 with 85 kg/1000 mm
 Charging time : 3 hours
 Intermittent : 20/80, 4 hours

Max. number of lifts
 in series : 44 med 175 kg/1000 mm
 36 med 205 kg/1000 mm
 Charging time : 3 hours
 Intermittent : 10/90, 4 hours